



ILLUSTRATIONS

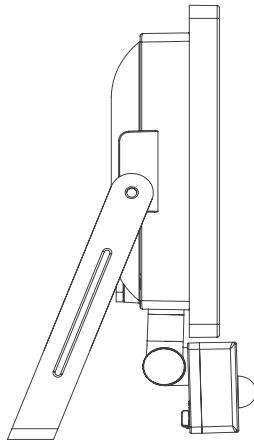

eurolux
Lighting your way

LED Floodlights with Sensors

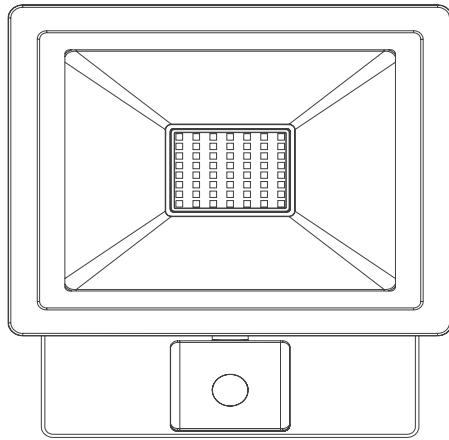

FS252



FS253



FS254

FS252: 1 x 10W Integrated LED 220 - 240V

FS253: 1 x 20W Integrated LED 220 - 240V

FS254: 1 x 30W Integrated LED 220 - 240V

PRODUCT CODE

FS252 / FS253 / FS254

ENVIRONMENTAL PROTECTION



Waste electrical & Electronic equipment regulations requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such products from other waste types and recycle it responsibly at your local facilities.

Cape Town - 9 Racecourse Road, Milnerton, 7441
Johannesburg - 10 Milkyway Avenue, Linbro Business Park, Sandton, 2065
web: www.eurolux.co.za


Please read instructions before commencing installation and retain for future reference.

IMPORTANT SAFEGUARDS

FS252 / FS253 / FS254 - attachments:

If the external flexible cable or cord of this luminaire is damaged, it should be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

To ensure that you get maximum longevity and maximum use out of your luminaire, please observe the following safety instructions.

 Electrical products can cause death, injury, or damage to property. Installation of the luminaire must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.

- Before connecting this luminaire, ensure that voltage indicated on the rating label corresponds with the mains voltage in your home.
- When changing the lamp, ensure that the power is turned off.
- This luminaire is checked in full for conformity to the quality standards and safety requirements.
- The manufacturer / supplier is not responsible for any damage of properties and persons, caused by the incorrect use or installation of the luminaire.
- Should you be unsure of how to install this luminaire correctly, please consult a professional electrician or your supplier for assistance.
- Ensure all items/ components, threads and screws are tightly secured.

IMPORTANT:

- Tampering with this luminaire, IE. Using silicon sealers or incorrect cabling, will invalidate your warranty.
- When the protection glass is damaged, it should be replaced immediately. The luminaire must not be used without the protection glass.
- Please check whether the connection of the power cord is safe and reliable before installation.
- Always ensure that the mains supply voltage is correct.
- Always replace the lamp with one of an identical rating.
- Ensure that you do not place the luminaire near any combustible materials and / or surfaces.
- Choking hazard: May contain small parts. Keep away from children.
- Do not insert your fingers or any part of your body into the electrical contact and sockets of this product whilst it is connected to the electricity supply.
- Item may vary slightly from the picture on the carton.
- Coastal humidity may effect the longevity of the luminaire.
- Outdoor luminaires must be cleaned to prevent rust occurring.
- Use a copper grease on all screws or strings.

SPECIFICATIONS

- **Fitting:** Die cast aluminium with clear tempered glass lens.
- **Class:** Class1. Requires earth connection.
- **IP Rating:** IP 44
- **Voltage:** 220V - 240V ~ 50Hz
- **Dimensions:**
 - FS252 - (H)131mm x (W)89mm x (D)30mm
 - FS253 - (H)175mm x (W)162mm x (D)26mm
 - FS254 - (H)225mm x (W)241mm x (D)31mm
- **Weight:**
 - FS252 - 0.3kg
 - FS253 - 0.509kg
 - FS254 - 0.904kg
- **Lamp Type:**
 - FS252 - 1 x 10W Integrated LED 230V
 - FS253 - 1 x 20W Integrated LED 230V
 - FS254 - 1 x 30W Integrated LED 230V
- **Maximum Projected Area:**
 - FS252 - 0.00385m²
 - FS253 - 0.01008m²
 - FS254 - 0.02080m²
- Commercial / domestic use
- Suitable for outdoor use when used correctly.
- This fixture must be mounted in the horizontal position.
- The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire should be replaced, or the light source should only be replaced by the manufacturer.

Sensor Controls

- **TIME:** the length of time the unit remains switched on after activation can be adjusted from approx. 10±3seconds to 8±2minutes.
- **LUX:** turning control to “Sun” symbol means the fitting is set to work day and night. Turning control to “Moon” symbol means the fitting only works at night.
- **SENS:** the Maximum distance the PIR sensor detects motion (maximum is 10m).

CLEANING

- Before cleaning always ensure the power supply is turned off.
- Do not immerse the luminaire in water.
- No abrasive products, solvents, detergent may be used to clean this luminaire.
- Ensure that the luminaire does not come in contact with corrosive chemicals, etc.
- Coastal areas ensure that the luminaire is cleaned fortnightly.